

# EXR8-1300

EFORT


EXR8-1300,  
Maximum payload 8 kg with maximum reach 1291 mm.

## Highlights

Developed and designed based on EFORT's mature platform, it is stable and reliable;  
Equipped with a battery-free encoder, featuring a fully sealed design, fully wrapped cables, and closed-loop explosion-proof control with a complete cavity, it is safer;  
Explosion protection level: Ex db ib pxb IIC T6 Gb; Ex ib pxb tb IIIC T80°C Db. It can be used in hazardous environments in Zone 1 and Zone 21;

## Applications

It can be applied to dust or gas explosion-proof scenarios in handling, sorting, assembly, grinding, polishing, spraying, and other applications.

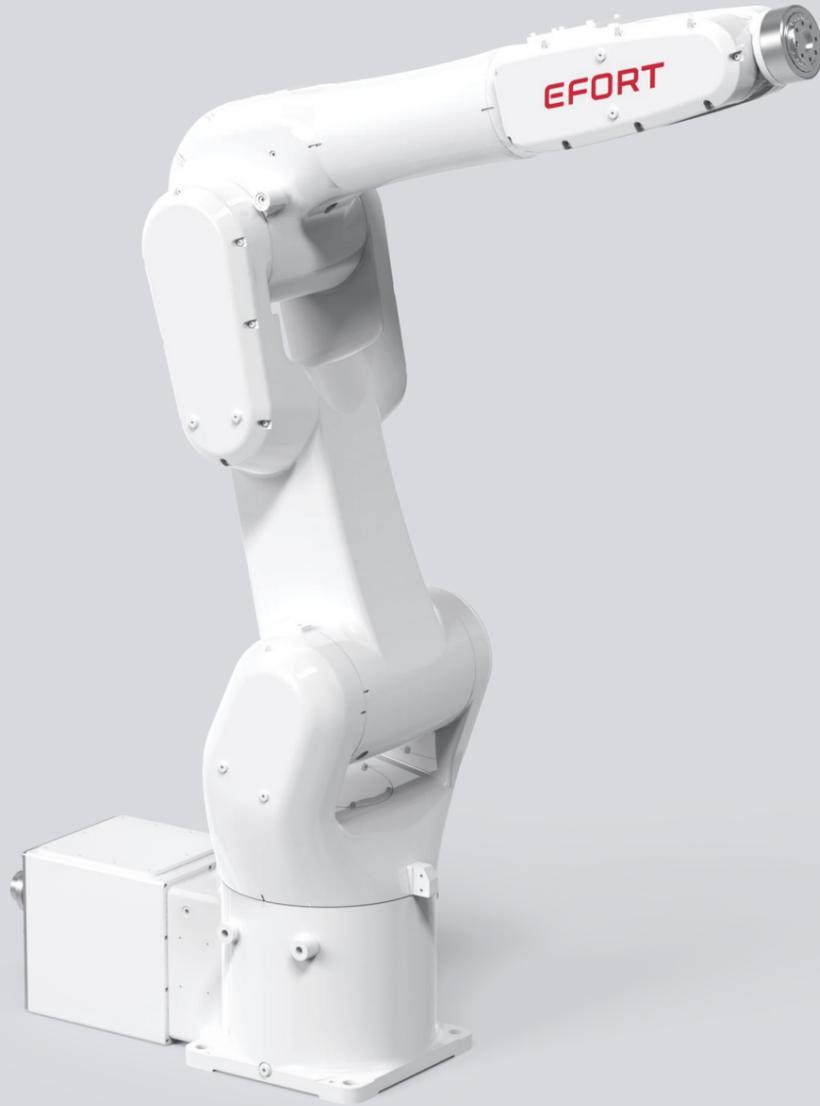


## SPECIFICATIONS


Model	EXR8-1300	
Type	Articulated	
Controlled axes	6 Axes	
Max. payload on wrist	8 kg	
Repeatability	±0.03 mm	
Robot weight	94 kg	
Reach	1291 mm	
Robot IP grade	IP65	
Cabinet IP grade	IP54	
Explosion protection level	Ex db ib pxb IIC T6 Gb Ex ib pxb tb IIIC T80°C Db	
Drive mode	AC servo drive	
Installation	Floor	
Installation environment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80% (No dew nor frost allowed)
	Vibration acceleration	4.9 m/s <sup>2</sup> (<0.5 G)

Allowable load moment at wrist	J4	25 N·m
	J5	25 N·m
	J6	12 N·m
Allowable load inertia at wrist	J4	0.78 kg·m <sup>2</sup>
	J5	0.78 kg·m <sup>2</sup>
	J6	0.3 kg·m <sup>2</sup>
Maximum speed	J1	230°/sec
	J2	190°/sec
	J3	240°/sec
	J4	500°/sec
	J5	420°/sec
	J6	720°/sec
Motion range	J1	±170°
	J2	+100°-130°
	J3	+193°-75°
	J4	±190°
	J5	±120°
	J6	±360°


## OPERATING SPACE

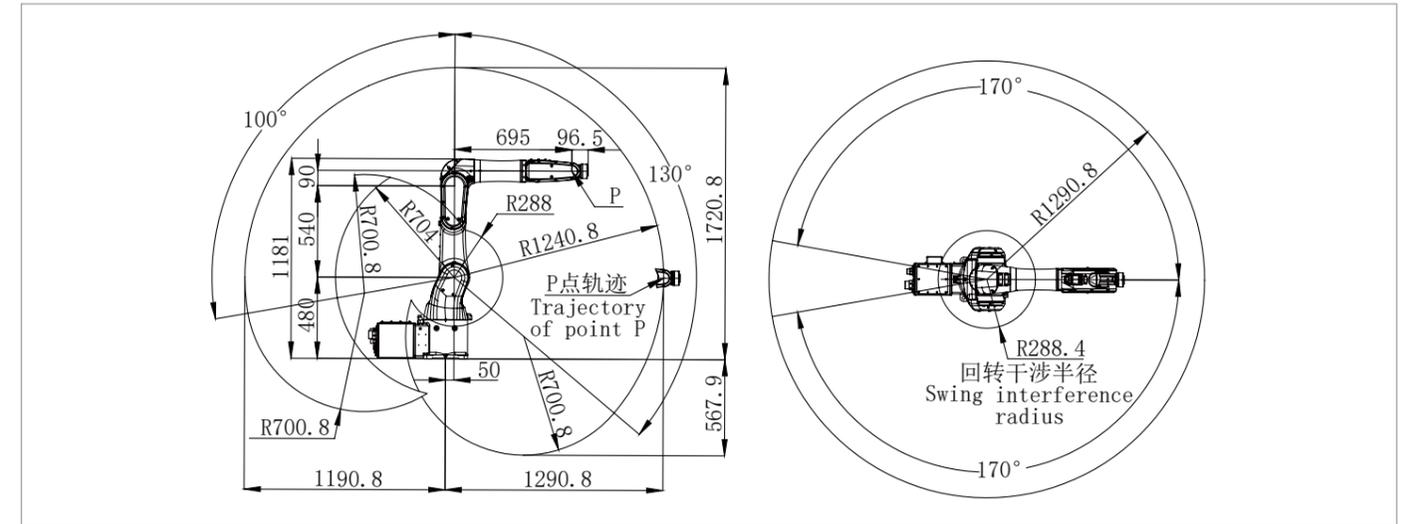

## BASE MOUNTING SIZE

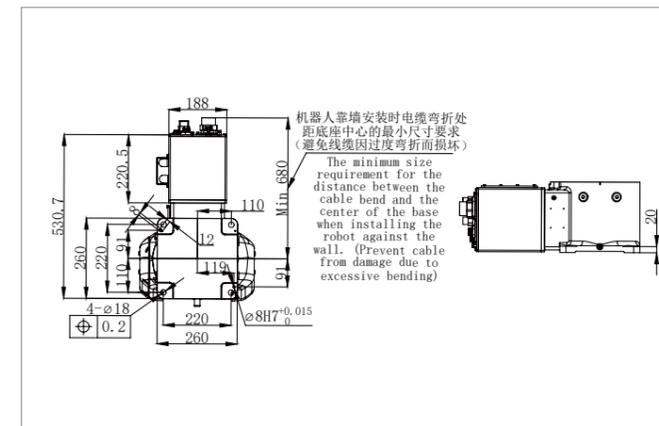

## END FLANGE MOUNTING SIZE

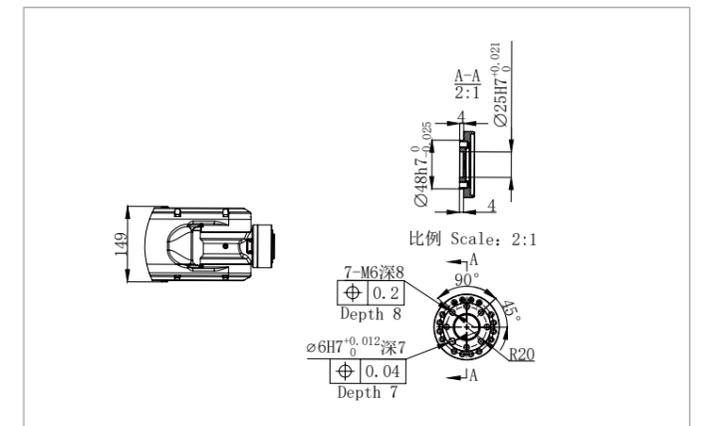

EFORT Intelligent Robot Co., Ltd.  
PHONE: (00 86) 400-052-8877  
ADDRESS: No. 96, Wanchun East Road, Wuhu, China  
(Anhui) Pilot Free Trade Zone  
WWW.EFORT.COM.CN